


Standard Bulk Storage Tank

7,000 gal. through 13,000 gal.

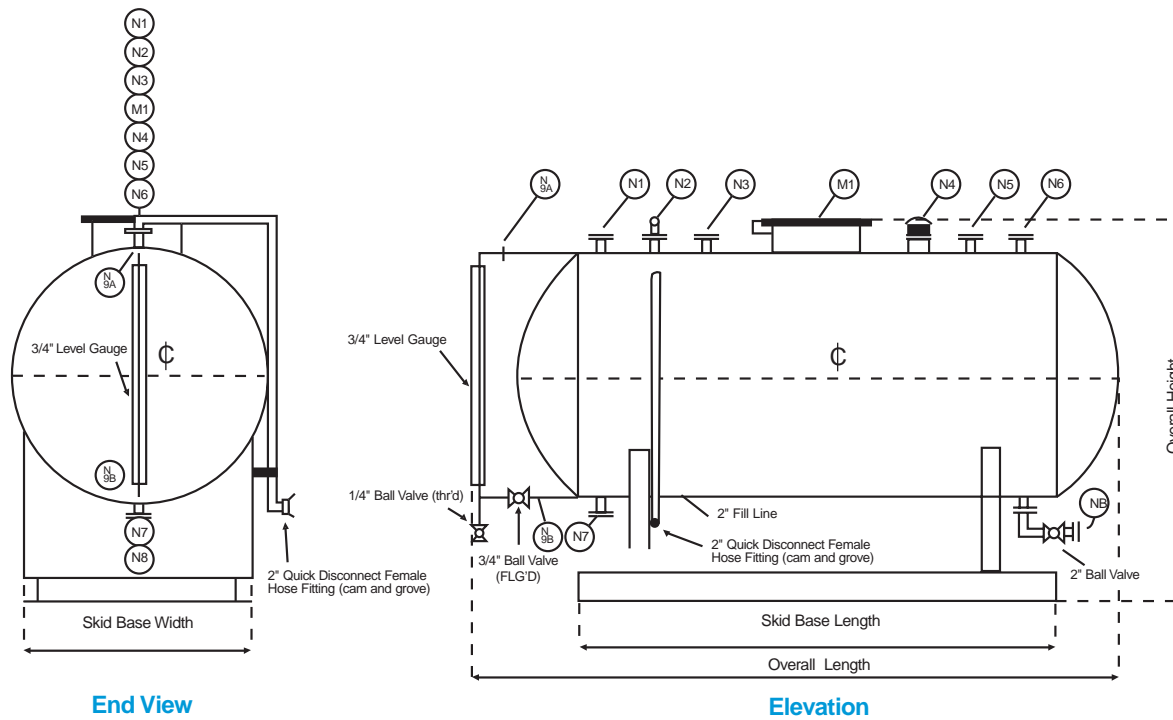

Nozzle Schedule

MK	Size	# Req'd	Description
N1	3"	1	Spare
N2	2"	1	Fill Line
N3	2"	1	Vent Filter
N5	2"	1	Spare
N6	2"	1	Degassing Line Return
N7	3"	1	Spare
N8	2"	1	Outlet to Application
N9 A&B	3/4"	1	Level Gauge
M1	36"	1	Manway

Capacity	Capacity	OAL	OAH	SBL	SBW	Diameter	Material	Weight Empty-AL	Weight Empty-SS
7,000 gal.	7,400 gal.	18' - 3 5/8"	11' - 0"	13' - 0"	7' - 10 1/2"	8' - 6" OD	Shell - 304L SS	—	8,100 lbs.
7,000 gal.	7,000 gal.	16' - 3 7/8"	11' - 6"	12' - 0"	7' - 10 1/2"	9' - 0" OD	Shell - 5254 AL or 304L SS	5,500 lbs.	9,900 lbs.
10,000 gal.	10,300 gal.	23' - 3 7/8"	11' - 6"	17' - 0"	7' - 10 1/2"	9' - 0" OD		6,800 lbs.	12,600 lbs.
13,000 gal.	12,700 gal.	28' - 3 7/8"	11' - 6"	21' - 0"	7' - 10 1/2"	9' - 0" OD	Skid - CS	8,400 lbs.	14,600 lbs.

DWG NO: T-1 Revised 6-15-04
 Copyright 2004, Solvay Chemicals, Inc.
 All Rights Reserved.
www.solvaychemicals.us 1.800.765.8292

Solvay
Chemicals



Interox, Fluorides & Minerals